




AQUA COOLER PTY LTD  
 161 ORCHARD ROAD  
 CHESTER HILL NSW 2162  
 Ph: (02) 9721 9333 Fax: (02) 9721 9344  
[www.aquacooler.com.au](http://www.aquacooler.com.au)

**INSTALLATION INSTRUCTIONS - MODEL: UB3**

**1) VENTILATION**

Where the unit is being installed in a cupboard or enclosed space, it is essential that sufficient ventilation is provided to carry heat away from it.

The following vent layout pictured below is required:

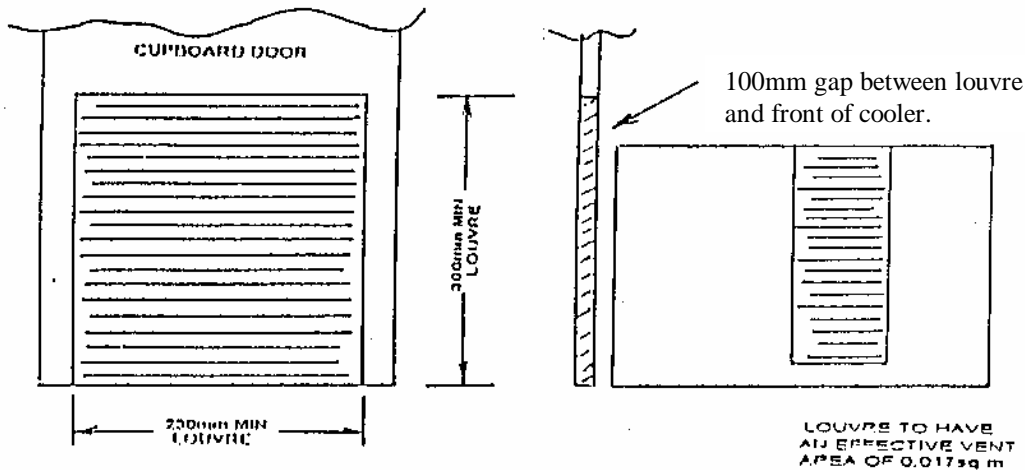

**Please note orientation of unit per affixed label on lid.**

**2) PLUMBING**

The cold water line from the unit to the tap or jug filler should be run in 6.2mm (1/4") piping. This line must be insulated.

After installation of pipework, slowly turn on main water valve and open tap or carafe filler allowing water to run. Close off and check joint for water leaks.

**Do not install unit in a cupboard along side a water heater.**

**3) FREE STANDING**

Where the unit is being installed in a free standing situation, allow 100mm of free space on all sides of the cooler, with a minimum 300mm above the unit.

**4) OPTIONAL EXTRAS**

- Glass filler.....Pt No: Z-3019  
(including fittings and dress washer)
- 1 meter insulation.....Pt No: Z-6052