

**A Q U A
COOLER®**

**PT30
CENTRAL
STORAGE**



**PT30
CENTRAL
STORAGE
UNIT**

MODEL

PT30 CENTRAL STORAGE UNIT
SUPPLIES CHILLED WATER FOR
UP TO SIX BUBBLERS

FEATURES

- Robust construction to ensure longevity.
- Reliable, safe and efficient.
- Suitable for schools, universities and the mining industry.
- 135 litre tank capacity/90 litres of chilled water per hour
- Automatic temperature control.
- PROUDLY AUSTRALIAN MADE

CONTACT

AQUA COOLER PTY LIMITED
161 ORCHARD ROAD
CHESTER HILL NSW 2162 AUSTRALIA

TEL: (02) 9721 9333
FAX: (02) 9721 9344

EMAIL: sales@aquacooler.com.au
coolers@aquacooler.com.au

DRINKING WATER CHILLED TO PERFECTION
Visit www.aquacooler.com.au

AQUA COOLER®

WATER RESERVOIR

The 135 litre tank is tin plated for your safety and is fitted with a drain for periodic cleaning. The PT30 has a chilling capacity of 90 litres per hour during peak periods.

REFRIGERATION

The refrigeration system uses 907 gms of R22 refrigerant. It is non-toxic, non-flammable and environmentally sympathetic.

WATER CONNECTIONS

$\frac{3}{4}$ " BSP compression fittings.

TEMPERATURE CONTROL

The thermostat is factory pre-set.

COMPRESSORS

$\frac{1}{2}$ hp nominal capacity, hermetically sealed for silent running.

CONDENSER

The condenser is of copper tube and expanded aluminium fin.

ELECTRICAL

240 volts, 50Hz. A 2 metre house cable and 3 pin plug are supplied. The full load current is 3.74 amps.

PERFORMANCE TO ARI 1010-94 STANDARD

Inlet water – 26.7°C

Outlet water – 10°C

Ambient air – 32.2°C

WEIGHT – PACKED

90kgs

DIMENSIONS – PACKED

650mm long x 720mm wide x 134mm high.

SERVICE

Removable lid gives instant access to the refrigeration system.

INSTALLATION NOTE

1. For installation details specific to your use of the PT30, contact the manufacturer or distributor.
2. A 350 Kpa / pressure reduction valve is supplied with this unit for use by the plumber during installation to the water supply.

WARRANTY

Twelve months comprehensive coverage.


Five years for compressor replacement.



DISTRIBUTED BY

PT30

CENTRAL STORAGE UNIT

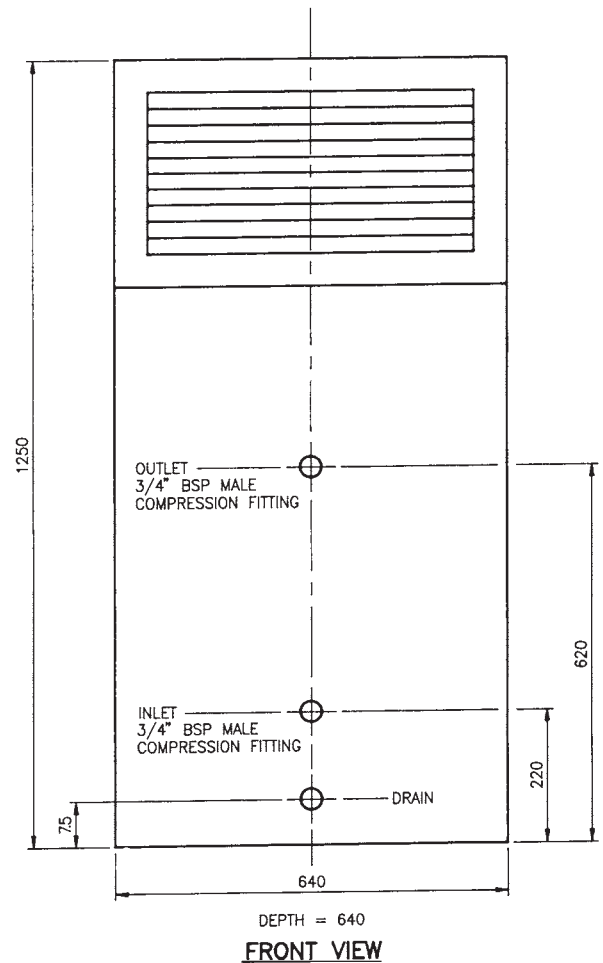

OTHER FEATURES

APPLICATION

Suitable for connection to a series (of up to 6) bubblers mounted on a drinking trough

INSTALLATION NOTE

Pressure relief valve supplied