

AQUA COOLER®



SP SERIES

**NEW SQUARE
POINT-OF-USE
WATER
COOLERS
MAINS CONNECTED**



MODELS

- SP2G - COOK & COLD
- SP2GF - COOK & COLD FILTERED
- SP3G - HOT & COLD
- SP3G - HOT & COLD FILTERED
- COLOUR: GRANITE ONLY

FEATURES

- Integral Recess for filters
- Stylish granite finish
- No drain required
- Unique Float Valve Assembly
- Contemporary design to suit any workplace
- World class reliability and performance
- Cup dispenser bracket and cover included

PROUDLY AUSTRALIAN MADE

CONTACT

AQUA COOLER PTY LIMITED
161 ORCHARD ROAD
CHESTER HILL NSW 2162 AUSTRALIA

TEL: (02) 9721 9333
FAX: (02) 9721 9344

EMAIL: sales@aquacooler.com.au
coolers@aquacooler.com.au

DRINKING WATER CHILLED TO PERFECTION
Visit www.aquacooler.com.au

AQUA COOLER®

COLD WATER RESERVOIR

All products have a highly polished, stainless steel tank which holds 1.8 litres of chilled water during normal usage. Each cooler has a chilling capacity of 5 litres per hour during normal peak periods.

HOT WATER RESERVOIR

The stainless steel hot water tank is fitted with a high performance 575-watt band heater. This model delivers 50 cups (150ml) of hot water per hour at approximately ±90°C. Hot tanks have drains fitted for easy cleaning and sanitization. It is very easy to remove for service if required. Each tank has its components swaged together. As no fusion welding is used, the occurrence of pitting, crevice or galvanic corrosion is prevented.

TEMPERATURE CONTROL

A factory pre-set thermostat controls the temperature of water in the cold tank. The water temperature in the hot tank is controlled by a mechanical thermostat set to approximately 95°C.

COMPRESSOR

1/16 h.p. capacity 49 watts. The compressor is hermetically sealed for silent running.

CONDENSER

The static condenser is fabricated from steel tube and wire.

FILTER OPTION

All filtered units house a high quality 5 Micron snap seal filtration system.

ELECTRICAL

240 volts, 50Hz. A 2 metre house cable and 3 pin plug is supplied.

PERFORMANCE

Water Inlet – 26.7°C
 Water Outlet – 10°C
 Ambient Air – 32.2°C.

WEIGHT - PACKED

SP2G - 16 kgs
 SP2GF - 17 kgs
 SP3G - 18 kgs
 SP3GF - 19 kgs

DIMENSIONS PACKED

Width – 320mm	Container Capacity
Depth – 320mm	20ft – 216 units
Height – 940mm	40ft – 430 units


WARRANTY

Twelve months comprehensive coverage.
 Five years for compressor replacement



SP SERIES

NEW SQUARE POINT-OF-USE WATER COOLERS MAINS CONNECTED

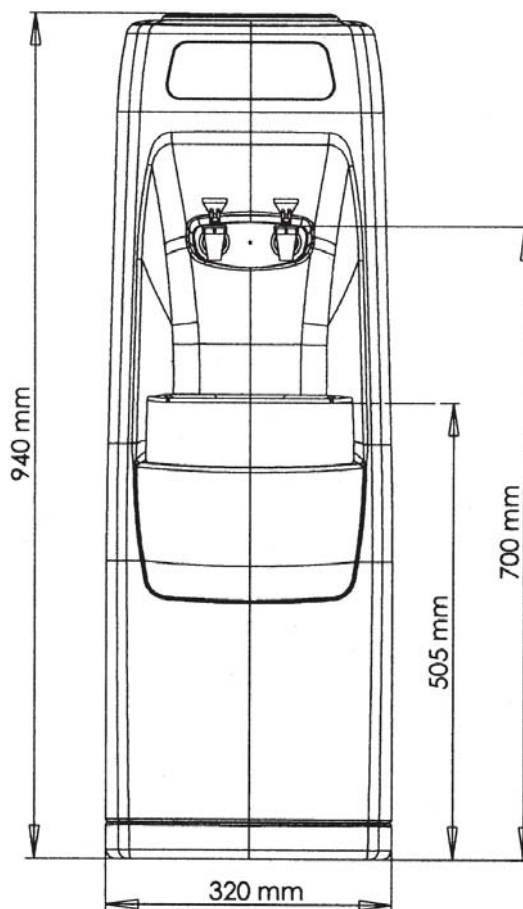

Selection Chart		
Filtered	Tap Outlet	Granite
NO	Cook & Cold	SP2G
	Hot & Cold	SP3G
Yes	Cook & Cold	SP3GF
	Hot & Cold	SP3GF

SPECIAL FEATURE

INTEGRAL RECESS FOR FILTERS

Situated at the rear of the water cooler is a recessed bracket designed specifically to house filter systems. The midway recess provides protection, allows for "hassle free" filter cartridge replacement and servicing, whilst accommodating most filters.